

SINCE 1894...



PRometheus

Magnetic Bearing Variable Speed
Centrifugal Chiller


DCLC-M 50/60Hz

Cooling Capacity: 316~2391kW (90~680RT)


Dunham-Bush Air Conditioning



**ASHRAE
90.1
COMPLIANT**

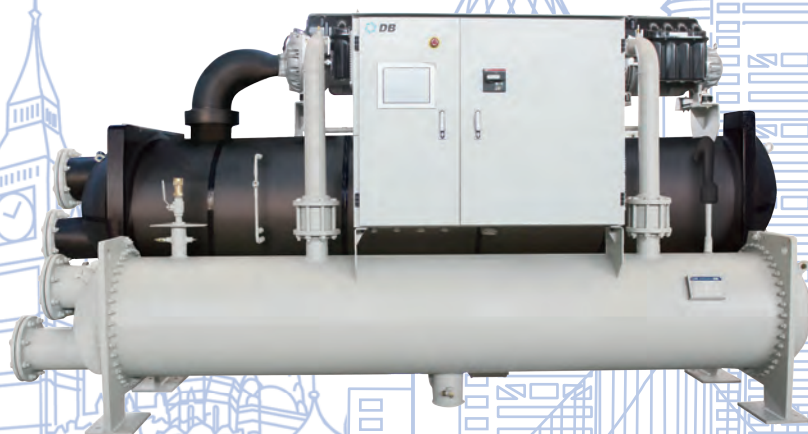

MILESTONE

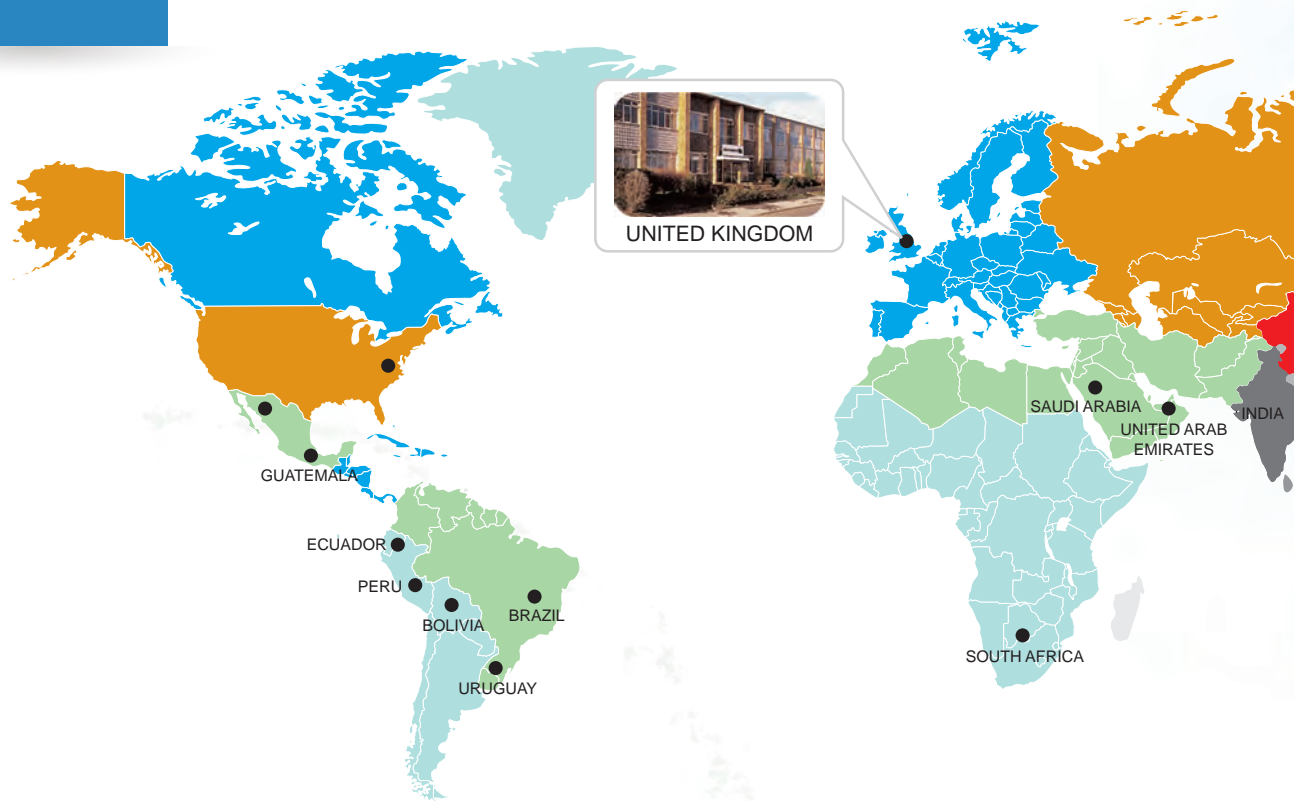

Dunham-Bush Profile

Dunham-Bush, one of the world's top commercial air conditioning manufacturers, has long been committed to offering creative solutions for the customer's requirements over its 120 years history in the HVAC/R. Dunham-Bush offers a complete range of HVAC/R products such as large chillers, unitary, airside system and thermal energy storages for residences, commercial buildings and industrial facilities. Dunham-Bush is striving to be the leader in the commercialization of green technologies. Today, by utilizing our global network of sales and service offices, Dunham-Bush is offering our value-added products and solutions to all corners of the world.



1894

Built in USA as a professional manufacturer of HVAC/R equipments.

1904

Developed the first air compressor system.

1906

The second Dunham-Bush comp

1924

Developed the first

1930

M
a



DUNHAM-BUSH MALAYSIA

Dunham-Bush Malaysia; founded in 1987, adhered to the innovation system of focusing on customers' demands to drive global research & design, and superior quality manufacturing. Nowadays Dunham-Bush Malaysia are creating innovative cooling solutions appropriate to the individual requirements of commercial building, schools, hospitals, airports, factories and residences. No matter where you are, what we deliver is the same: high performing, highly engineered cooling solutions developed to take on the challenges of the 21st century.

PROmetheus Magnetic Bearing Variable Speed Centrifugal Chiller DCLC-M




Dunham-Bush PROmetheus DCLC-M Series Introduction


Dunham-bush DCLC-M Centrifugal chillers with State-Of-The-Art magnetic bearing oil-free compressor offers owner packaged chiller with supreme efficiency, reliability and sustainability.

Features and Benefits

DCLC-M Centrifugal Chillers are designed to exceed ASHRAE Standard 90.1 requirements. The cutting edge magnetic bearing oil-free compressor, superior evaporator and condenser, Electronic Expansion Valve (EEV) and the intelligent chiller controller ensures the DCLC-M performance and stability when operates at both full load and part load conditions.

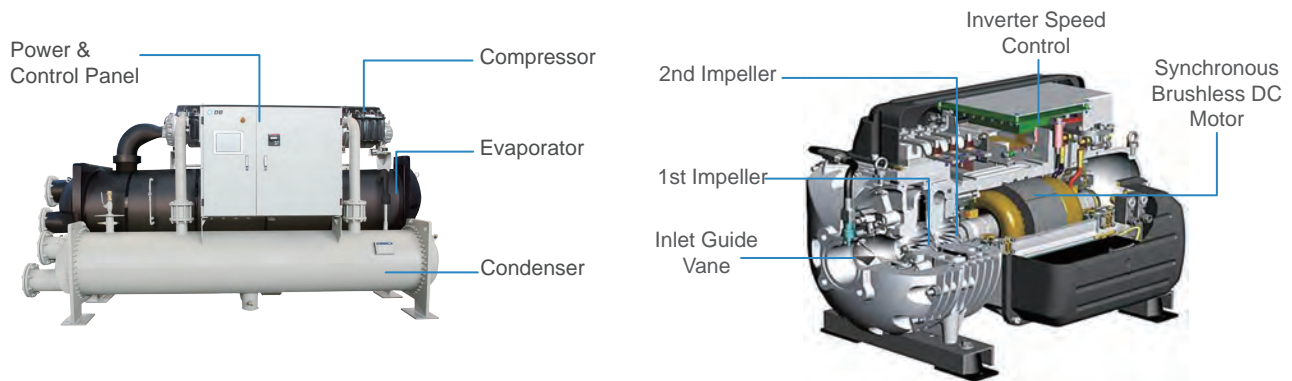

Nomenclature

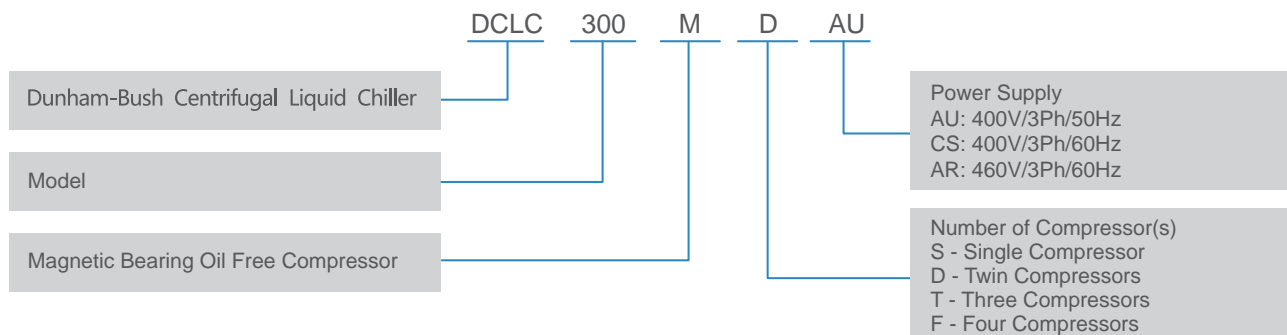


FEATURES



Advanced Technology

Magnetic Bearing

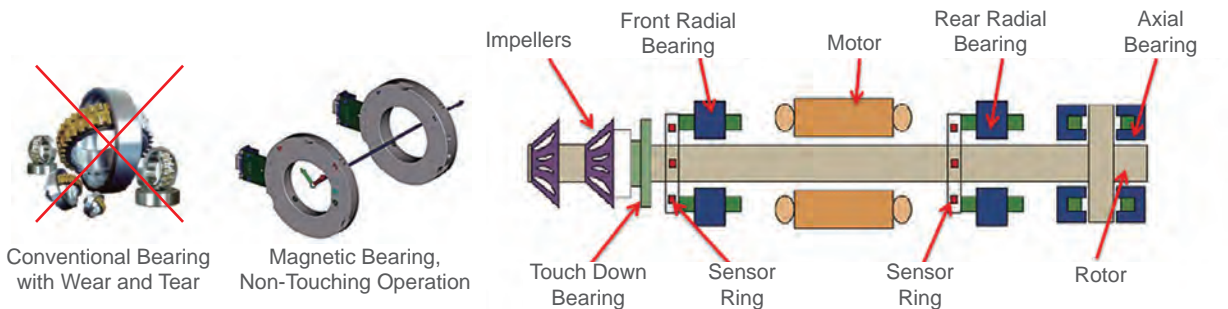


The axially and radially located magnetic bearings create electromagnetic field which levitates the shaft during rotation and float on the magnetic cushion. This has prevented contact between compressor shaft and other metallic surfaces, and thus, the oil lubrication system is no longer needed. The proximity sensors at bearings sense rotor movements and adjustment are made accordingly in the rate of 6,000,000 times per minute. This ensures precision of rotor position in the magnetic field.

Power Failure Protection

In the case of power failure, the capacitors (4 x 8000 μ F) provide backup power to bearings to keep the rotor levitated. The rotor will continue to rotate with its rotational inertia, and this will turn the motor into a generator which will then power itself down to a stop.



Inverter Speed Control & Soft-starter

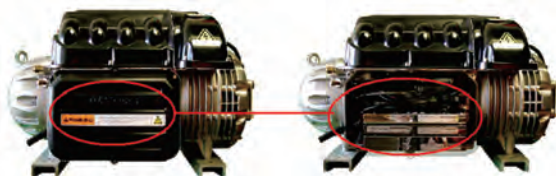

The Magnetic Bearing compressor is furnished with built-in inverter speed control and soft-starter, with below advantages:

- No surge current
- Wide operating range, can work at 10% minimum load
- High efficiency throughout the working range
- Auto-tuning on rotation speed to eliminate compressor surging

Direct Drive Rotor & Impeller

The impellers are keyed directly to the shaft and this is the only major moving compressor component. No transmission device needed and thus, eliminate the transmission losses and the compressor size can be much compact.


As no mechanical contact during the rotation, the unit noise level is greatly reduced.





FEATURES

Dual-Stage Compression



DCLC-M compressors are with dual-stage compression design. Compressors with dual-stage compression technology can be operated at higher lift and wider operating range. With the built-in inverter speed control, DCLC-M can be operated stably and efficiently at a wider operating range.

Refrigerant Liquid Level Control

By using Electronic Expansion Valve (EEV), the refrigerant flow into evaporator can be control precisely. In such, the refrigerant liquid level in evaporator can be controlled at the optimum level to maximized heat transfer in the flooded type, shell-and-tube heat exchanger.



Rapid Recovery

Conventional centrifugal chiller needs to ensured oil lubrication at right pressure and temperature before starting the compressor motor. Even with essential power supply to the oil lubrication system, it will easily take more than a minute to restart the compressor motor. Thanks to the oil-free technology, DCLC-M chillers can rapidly recover from a power failure with much shorter restart time. This is a great feature especially for data center and process cooling applications.



Energy Saving

- No Friction Loss – Compressor shaft has no physical contact with other mechanical components
- No Transmission Loss – With direct drive design at compressor shaft, conventional gear transmission is eliminated
- No Lubrication Oil – DCLC-M is Oil-Free. Heat exchanger's de-rating performance due to lubricating oil is prevented.
- High COP – DCLC-M full load COP is up to 6.54; IPLV is up to 11.8, far more efficient than conventional centrifugal chillers.

Below table shows an example to compare annual energy consumed by a 300RT DCLC-M (DCLC-300MD) versus a conventional 300RT centrifugal chiller, with 3000 hours operating time annually.

Model	DCLC300MD	Conventional 300RT
Cooling Capacity (KW)	1055KW	1055KW
IPLV	11.8	6.52
Annual Electricity Consumption (KW.h)	182,482	279,278
Electricity Saving (KW.h)	96,796	



Save 35% Energy

FEATURES



Easy Maintenance



- **No Oil Lubrication System-**
Improve unit reliability. Free from lubrication oil related problems, such as low oil level, low oil pressure and etc.
- **Direct Drive Impeller-**
Only one major moving part in the compressor, less components, less failure.
- **Easy Maintenance-**
Without oil lubrication system, routine maintenance becomes very simple. The compressor is virtually maintenance free.
- **No Overhauling-**
Periodic overhauling is not required by DCLC-M chillers.

Maintenance work	Standard Chiller R123	Standard Chiller R134a	PROmetheus DCLCM
Change the lubrication oil	Once a year	Each three year	No need
Change oil filter core	Once a year	Once a year	No need
Check oil pump pressure	Once a quarter	Once a quarter	No need
Check oil quality	Once a week	Once a week	No need
Check the pressure differential through oil filter	Once a month	Once a month	No need
Compressor Vibration test	Once a year	Once a year	No need
Oil pump insulation inspection	Each three year	Each three year	No need
Oil heater inspection	Each three year	Each three year	No need
Motor winding inspection	Once a year	Once a year	No need
Contact and overload set inspection	Once a year	Once a year	No need
Refrigerant inspection	Once a week	No need	No need
Change refrigerant filter core	Once a quarter	No need	No need




FEATURES



Environmental Protection

- Dunham-Bush DCLC-M chiller is operated with HFC-134a refrigerant, an environmental friendly refrigerant with no Ozone Depletion Potential (ODP) and no phasing out date as per Montreal Protocol.
- Low noise - Compressor noise level as low as 73 dB(A). Chiller Plantroom does not required acoustic treatment.
- Low vibration
- LEED points - Helps to earn points in Energy and Atmosphere category for LEED certification

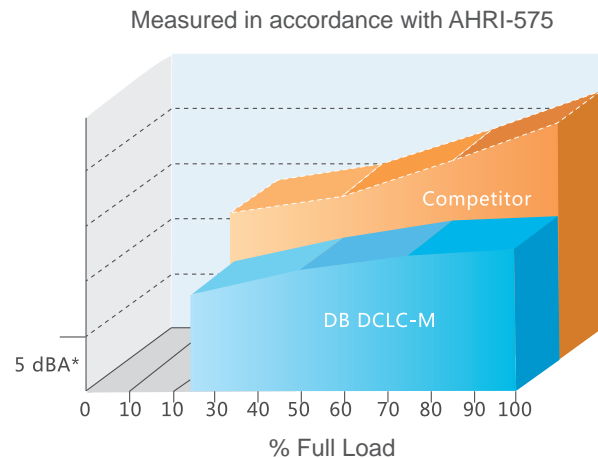


The rotating impeller and shaft is levitated at the magnetic field cushion, and have no physical contact with other components during the operation. Therefore, the unit structural vibration is virtually zero. With the permanent magnet DC brushless motor, the noise level is further reduced. Dunham-Bush DCLC-M centrifugal chillers will be best solution for installation at sound level sensitive area.



Intelligent Control System

- Low starting current thanks for inverter speed control and softstarter
- Dunham-Bush DB Director control the system efficiently and effectively
- 15.4" Color Touch Screen Panel
- Display unit operating parameters
- Programmable Unit Operating Schedule
- Self diagnosis on alarm. Last 10 alarms are recorded
- Single power point connection
- BMS communication protocol- Modbus, BACnet, Profibus

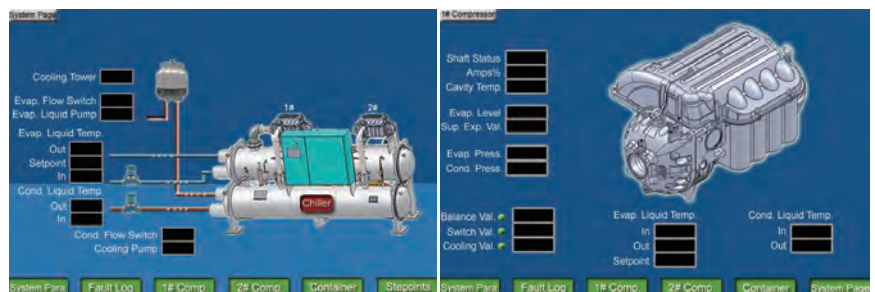


FEATURES



BMS Connectivity, Chiller Plantroom Control

- Built-in ModBus RTU RS485 port for direct interfacing of Building Management System (BMS). Profibus RS485 communication protocol is available as option
- DB Chiller Plant Manager, DB-CPM, a trustworthy and headache-free solution for building owners and users on chiller plant control and automation system
- DB-CPM's advanced controllers supervise equipments in chiller plant such as chillers, pumps, cooling towers and variable frequency drives (VFD); and monitor field devices such as, flow meters, energy meters, digital power meters, sensors & transducers.
- NetVisorPRO – Monitoring software of DB-CPM system provides graphical animations on system operation, temperature and energy trend graphs, historical data and alarm history logs.

Chiller plantroom control and automation by Dunham-Bush DB-CPM provides owners a chiller system with stable and optimized performance in its operation.

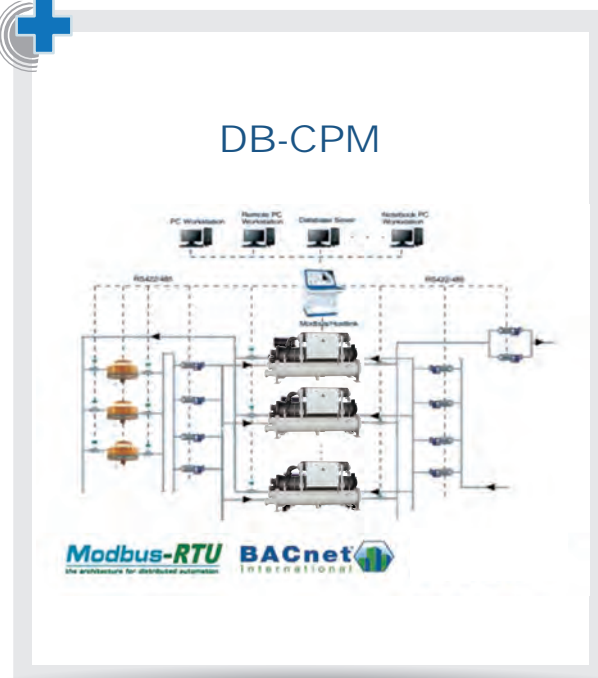

Standard & Optional Features

Item	Standard	Option
Water Connection	Victaulic groove	Flanged; Marine Waterbox
Design Working Pressure (Vessel-Water Side)	1.0MPa	2.0MPa
Evaporator Insulation Thickness	25mm	50mm
Compressor Service Valve	Suction & Discharge	—
Spring Isolator	—	Neoprene Pad; Spring Isolator
Compressor Main Power Isolation	Compressor Circuit Breaker	Main Incoming Isolator
Main Incoming Options	—	Ground Fault Protection (GFI); Digital Power Meter (DPM); EMI Filter
Communication Protocol	Modbus RS485; ModBus TCP/IP; BACnet TCP/IP	BACnet MSTP; LONworks



SPECIFICATIONS



DCLC-M Technical Specifications


Model	COMPRESSORS		UNIT DIMENSIONS			UNIT WEIGHT	
	Model	Qty	Length	Width	Height	Operating	Shipping
			mm	mm	mm	kg	kg
DCLC120MS	TT350	1	2750	1020	2040	2691	2421
DCLC150MS	TT400	1	2750	1020	2040	2863	2553
DCLC190MS	TT500	1	2750	1020	2040	2932	2622
DCLC210MD	TT350	2	4027	1020	2040	3531	3171
DCLC240MD	TT350	2	4027	1020	2040	3730	3310
DCLC270MD	TT350	1	4063	1160	2117	4287	3827
	TT400	1					
DCLC300MD	TT400	2	4063	1160	2117	4328	3868
DCLC330MD	TT400	1	4063	1160	2117	4742	4202
	TT500	1					
DCLC370MD	TT500	2	4063	1160	2117	4808	4268
DCLC390MT	TT350	2	4360	1880	2080	5673	5217
	TT400	1					
DCLC420MT	TT350	1	4360	1880	2080	5822	5285
	TT400	2					
DCLC450MT	TT400	3	4360	1880	2110	5969	5432
DCLC480MT	TT400	2	4360	1880	2110	6135	5518
	TT500	1					
DCLC500MT	TT400	2	4405	1994	2110	6650	5974
	TT500	1					
DCLC540MT	TT400	1	4405	1994	2110	6708	6032
	TT500	2					
DCLC570MT	TT500	3	4405	1994	2110	6753	6077
DCLC600MF	TT400	4	4936	2096	2150	8359	7406
DCLC680MF	TT400	2	4936	2096	2150	8468	7515
	TT500	2					

DIMENSIONS




Unit Dimensions

Single Compressor

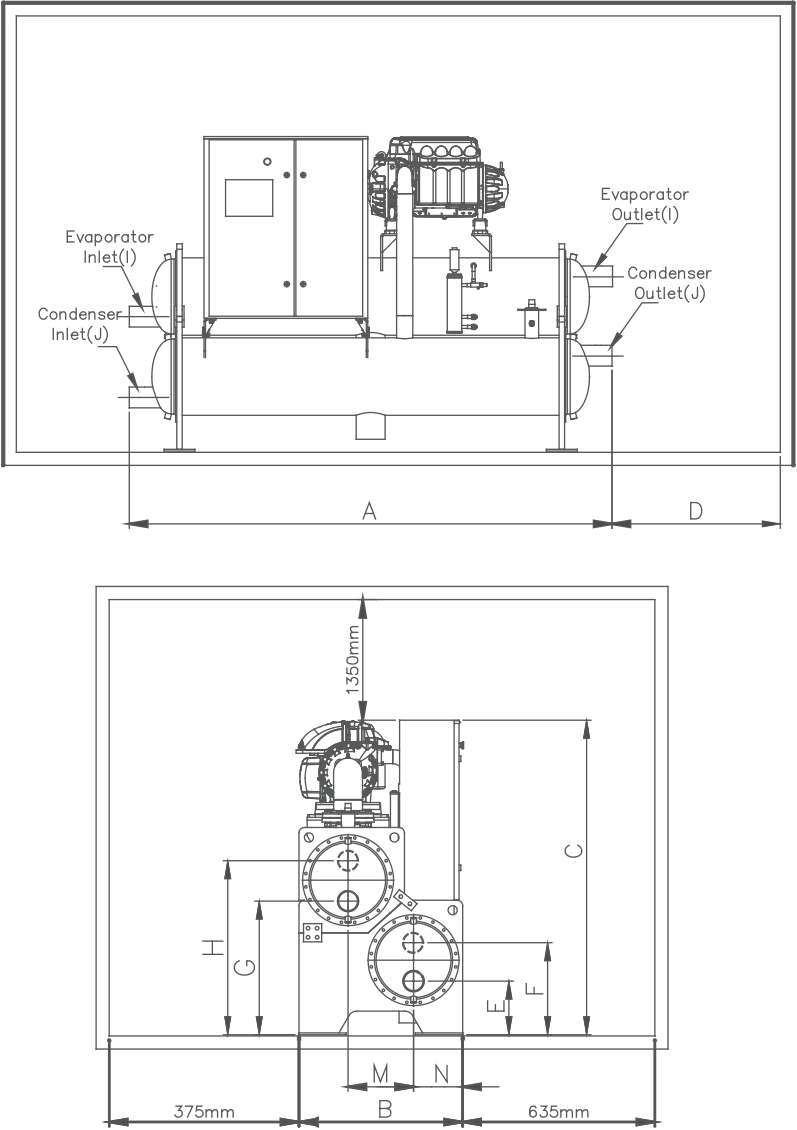

Model	Length "A"	Width "B"	Height "C"	Clearance For Tube Cleaning "D"	E	F	G	H	M	N	Condenser Water Conn. "J"	Evaporator Water Conn. "I"
	mm											
DCLC120MS	2750	1020	2040	2200	320	625	884	1226	365	315	6" NPS	6" NPS
DCLC150MS	2750	1020	2040	2200	320	625	884	1226	365	315	6" NPS	6" NPS
DCLC190MS	2750	1020	2040	2200	320	625	884	1226	365	315	6" NPS	6" NPS

Note: Above dimensions are based on standard unit, with 3 passes evaporator and condenser, 1.0MPa water side service pressure.




DIMENSIONS



Unit Dimensions

Twin Compressors

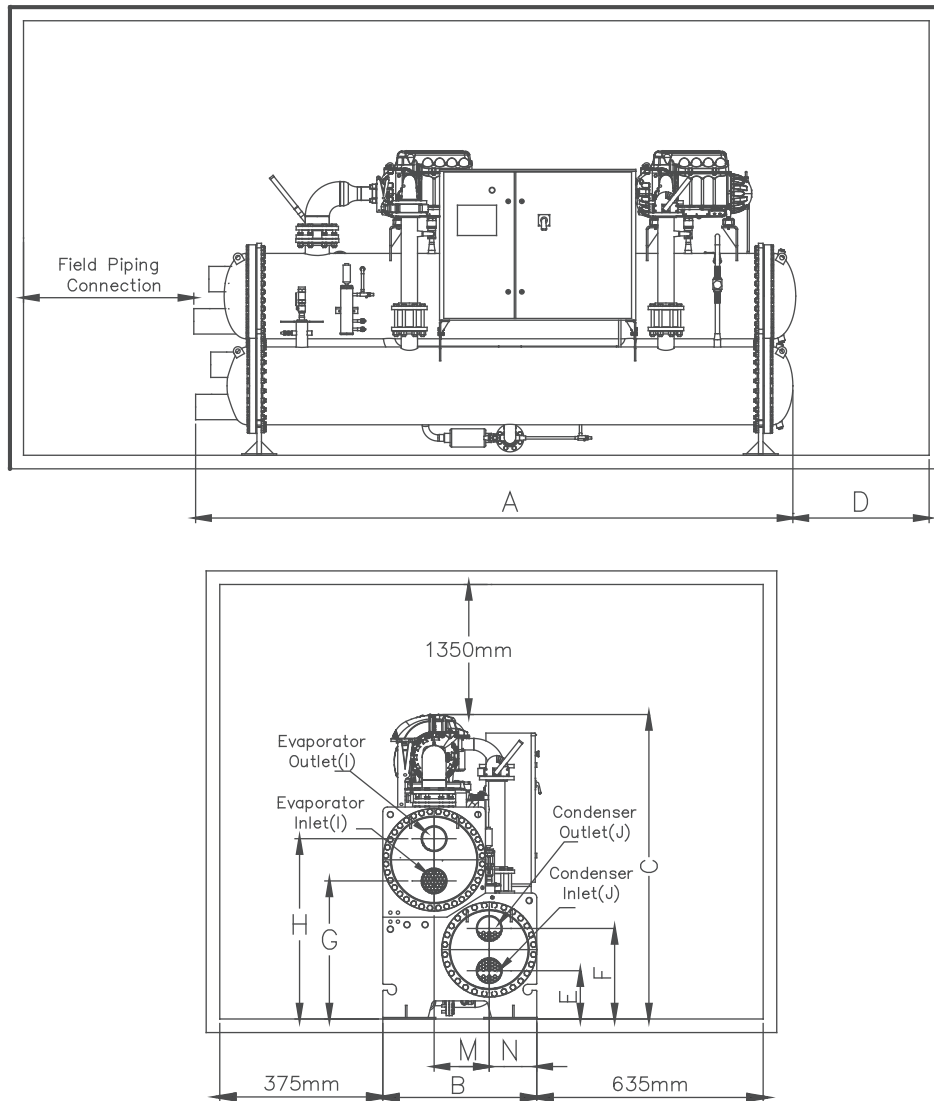

Model	Length "A"	Width "B"	Height "C"	Clearance For Tube Cleaning "D"	E	F	G	H	M	N	Condenser Water Conn. "J"	Evaporator Water Conn. "I"
	mm											
DCLC210MD	4027	1020	2040	3400	305	614	880	1230	365	315	8" NPS	8" NPS
DCLC240MD	4027	1020	2040	3400	305	614	880	1230	365	315	8" NPS	8" NPS
DCLC270MD	4063	1160	2117	3400	330	680	950	1300	400	380	8" NPS	8" NPS
DCLC300MD	4063	1160	2117	3400	330	680	950	1300	400	380	8" NPS	8" NPS
DCLC330MD	4063	1160	2117	3400	330	680	950	1300	400	380	8" NPS	8" NPS
DCLC370MD	4063	1160	2117	3400	330	680	950	1300	400	380	8" NPS	8" NPS


Note: Above dimensions are based on standard unit, with 2 passes evaporator and condenser, 1.0MPa water side service pressure, left hand side water piping connection (view from control panel)

DIMENSIONS



Unit Dimensions

Three & Four Compressors

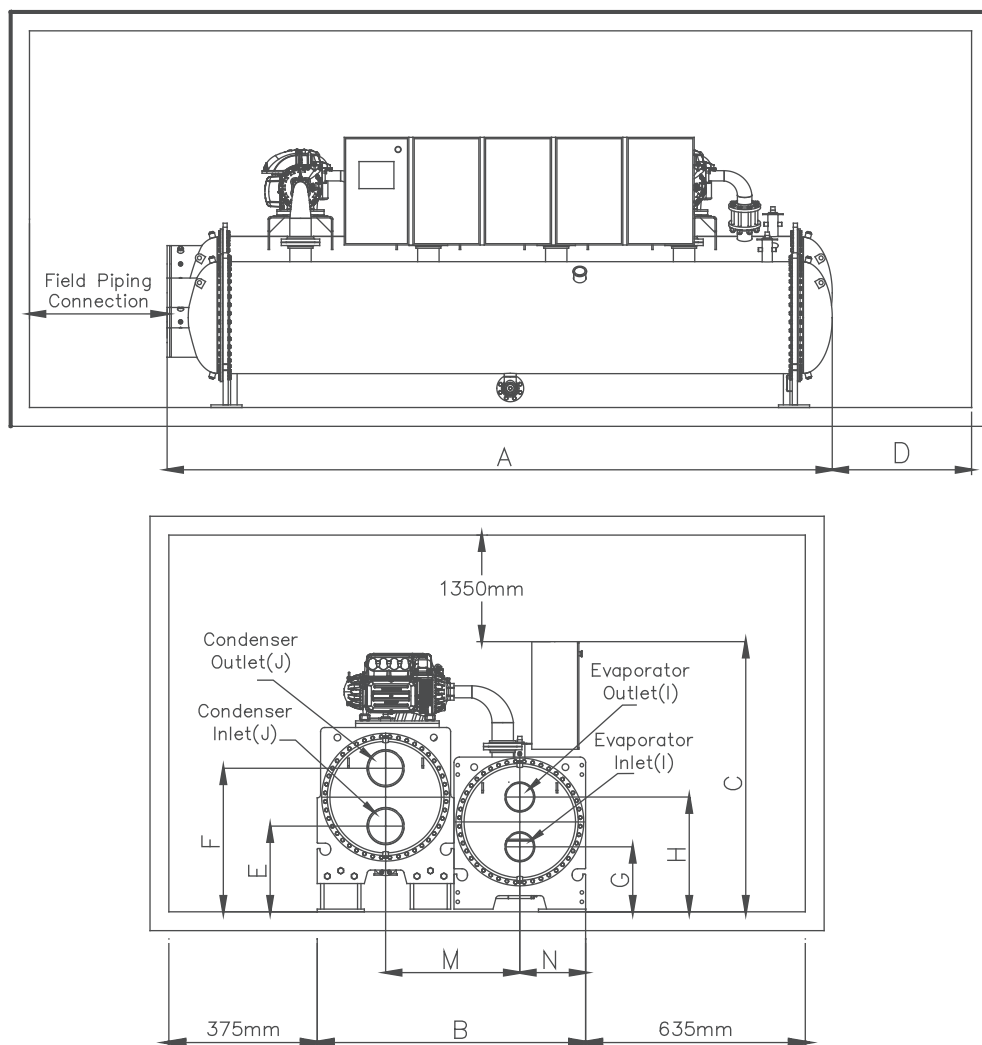

Model	Length "A"	Width "B"	Height "C"	Clearance For Tube Cleaning "D"	E	F	G	H	M	N	Condenser Water Conn. "J"	Evaporator Water Conn. "I"
	mm											
DCLC390MT	4360	1880	2080	3800	614	1027	480	855	940	464	8" NPS	8" NPS
DCLC420MT	4360	1880	2080	3800	614	1027	480	855	940	464	8" NPS	8" NPS
DCLC450MT	4360	1880	2110	3800	614	1027	480	855	940	464	8" NPS	8" NPS
DCLC480MT	4360	1880	2110	3800	614	1027	480	855	940	464	8" NPS	8" NPS
DCLC500MT	4405	1994	2110	3800	614	1027	461	874	997	489	8" NPS	10" NPS
DCLC540MT	4405	1994	2110	3800	614	1027	461	874	997	489	8" NPS	10" NPS
DCLC570MT	4405	1994	2110	3800	614	1027	461	874	997	489	8" NPS	10" NPS
DCLC600MF	4436	2096	2150	4300	678	1129	461	874	1048	489	10" NPS	10" NPS
DCLC680MF	4436	2096	2150	4300	678	1129	461	874	1048	489	10" NPS	10" NPS


Note: Above dimensions are based on standard unit, with 2 passes evaporator and condenser, 1.0MPa water side service pressure, left hand side water piping connection (view from control panel)



FOUNDATION



Foundation Drawing

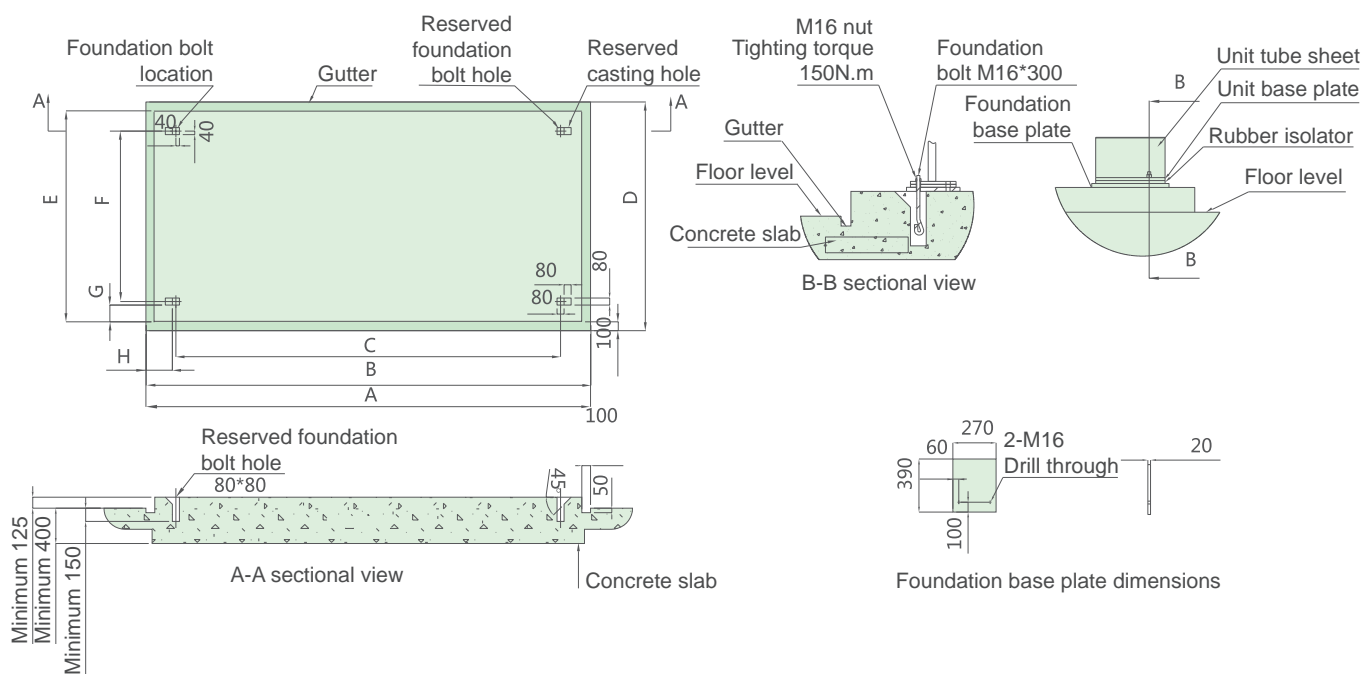

Model	A	B	C	D	E	F	G	H
	mm							
DCLC120MS	3132	2932	2252	1520	1320	860	190	300
DCLC150MS	3132	2932	2252	1520	1320	860	190	300
DCLC190MS	3132	2932	2252	1520	1320	860	190	300
DCLC210MD	4353	4153	3473	1520	1320	860	190	300
DCLC240MD	4353	4153	3473	1520	1320	860	190	300
DCLC270MD	4353	4153	3473	1660	1460	1000	190	300
DCLC300MD	4353	4153	3473	1660	1460	1000	190	300
DCLC330MD	4353	4153	3473	1660	1460	1000	190	300
DCLC370MD	4353	4153	3473	1660	1460	1000	190	300
DCLC390MT	4726	4526	3846	2252	2052	1592	190	300
DCLC420MT	4726	4526	3846	2252	2052	1592	190	300
DCLC450MT	4726	4526	3846	2379	2179	1719	190	300
DCLC480MT	4726	4526	3846	2379	2179	1719	190	300
DCLC500MT	4726	4526	3846	2379	2179	1719	190	300
DCLC540MT	4726	4526	3846	2379	2179	1719	190	300
DCLC570MT	4726	4526	3846	2379	2179	1719	190	300
DCLC600MF	5247	5047	4367	2443	2243	1783	190	300
DCLC680MF	5247	5047	4367	2443	2243	1783	190	300

Notes:

- Unit vibration is very low; generally foundation bolts are not required, unit can be installed directly on the foundation.
- When installation on foundation bolts is required, customer to supplies 4 nos of M16*300 foundation bolts and foundation base plates.

Products that perform...By people who care®

Malaysia

Lot 5755-6, Kidamail Industrial Park,
Bukit Angkat
43000 Kajang
Selangor Darul Ehsan
Malaysia

Tel: 603-8924 9000
Fax: 603-8739 5020

China

No.1 Dunham-Bush Road
Laishan District,
Yantai,
Shandong Province,
China 264003

Tel: 86-535-739 7888
Fax: 86-535-739 7999

United Kingdom

8 Downley Road
Havant
Hampshire
England PO9 2JD

United Arab Emirates

Office # 2606,
Fortune Executive Towers,
Cluster T1, Jumeirah Lake Tower
Dubai, UAE

South Africa

No.57 Sovereign Drive
Route 21 corporate Park
Irene, Pretoria
South Africa

Singapore

2, Kallang Pudding Road #07-07
Mactech Industrial Building,
Singapore 349307

Vietnam

10th Floor, Nam A Bank Tower,
201-203 Cach Mang Thang 8 Street,
District 3, Ho Chi Minh City

Thailand

1 Q House Lumpini,
27th Floor, South Sathorn Road,
Tungmahamek, Sathorn,
Bangkok Thailand 10120

Indonesia

The Vida Building 7th Floor
Jl. Raya Perjuangan No. 8 Kebon Jeruk
Jakarta 11530, Indonesia



Please Scan Here

for quick link to Dunham-Bush website

DUNHAM-BUSH®

www.dunham-bush.com

The manufacturer reserves the right to change specifications without prior notice.
©Dunham-Bush. All rights reserved.

M-S-04104A-0815